


HYDRAULIC TOE JACK

TekniPLUS make Toe jack is designed for lifting or moving loads from a sufficient resistant location using toe or head of the jack.

- Double acting cylinder Mechanism
- Toe and Top can be used for lifting the load
- Rigid Alloy Steel Body
- Temperature Reach -20° to +60°

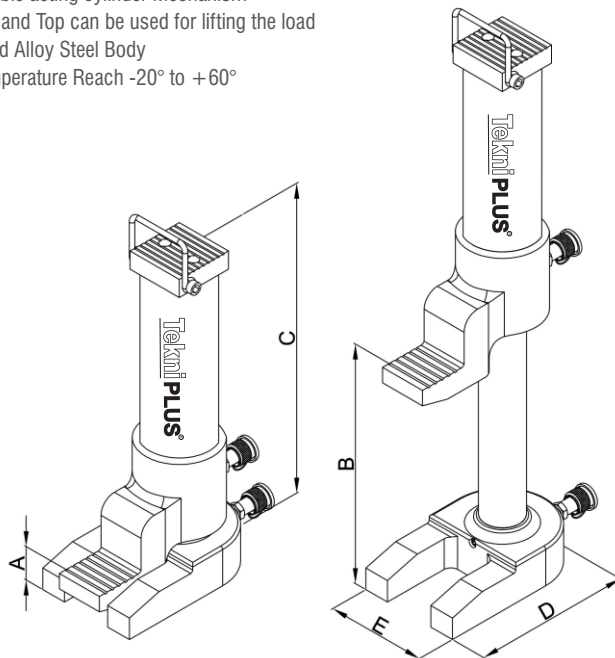

Model No.	Max. Lifting Force at the Centre (Ton)	Max. Lifting Force at the Toe (Ton)	Working Pressure (Bar)	Stroke (mm)	Insertion Height A (mm)	Low Cap Height B (mm)	Collaps. Height C (mm)	Base Overall Length D (mm)	Base Overall Width E (mm)	Weight, Ready for use (Kg)
TML-20	20	10	720	267	39	305	464	205	130	25.0